


Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;

Parameter

Size	2449mm(8.03ft)X55mm(0.18ft)X80mm(0.26ft)
Beam angle	96°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	≥ 0.9
Input power	total : 89W(11W/ft) up : 36W(4.5W/ft) down : 53W(6.7W/ft)
CCT	3000K/4000K/6000K (3500K , 5000K)
CRI	80+/90+
Lumen	total : 8400~8910lm(1050~1113lm/ft) up : 3360~3560lm(420~445lm/ft) down : 5040~5350lm(630~669lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Pendant, wall mounted
Package size	2570mm(8.43ft)X115mm(0.38ft)X92mm(0.3ft)
Gross Weight	7.2Kg




Size

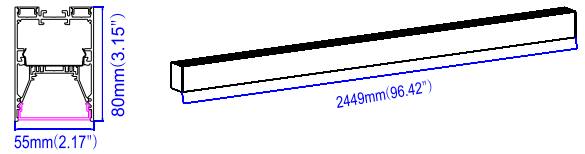



Standard color




Test report

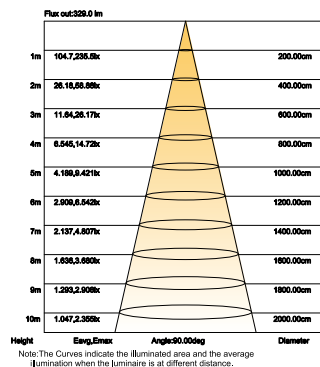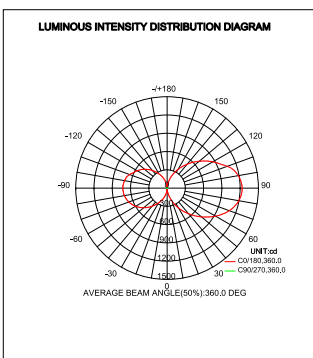

PDM



UGR < 19




Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$;

Optional accessories

Installation accessories



- Pendant



L-PTB-S



L-PT-S



L-PTB-NPF-S



L-PTB-PF-S



- Wall mounted



L5580D-WM

L-PTB-S: pendant wires with canopy


L-PT-S :pendant wires without canopy

L-PTB-NPF-S: pendant wire + canopy without cable hole


L-PTB-PF-S: pendant wire + canopy with cable hole

L5580D-WM: wall mounted clip

Disassembly tool

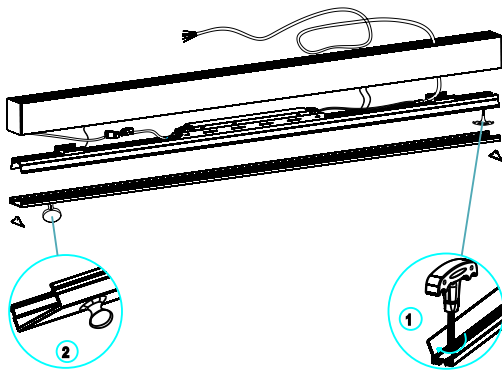

L-DA-D



L-DA-A

- Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker