


Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;


Size

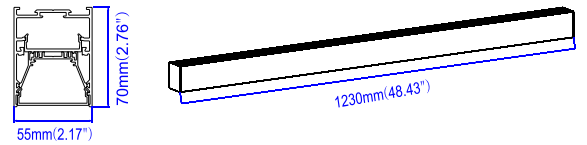


Parameter

Size	1230mm(4.04ft)X55mm(0.18ft)X70mm(0.23ft)
Beam angle	96°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	≥ 0.9
Input power	31W (7.8W/ft)
CCT	3000K/4000K/6000K (3500K 、 5000K)
CRI	80+/90+
Lumen	2900~3100lm(725~775lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Surface installation
Package size	1280mm(4.20ft)X115mm(0.38ft)X92mm(0.3ft)
Gross Weight	3.62Kg

Standard color


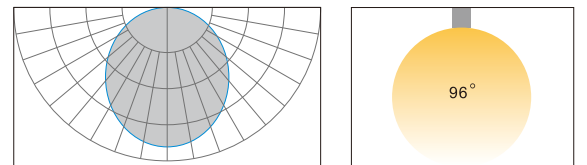


PDM

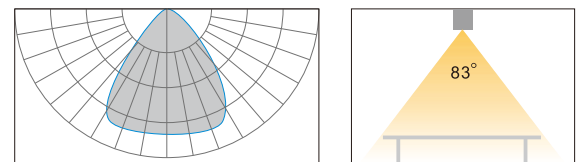

UGR<19

Test report

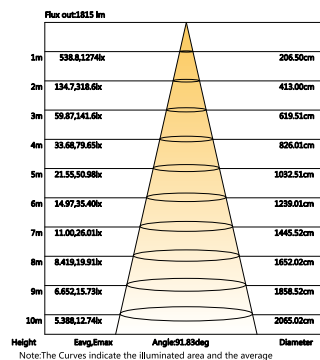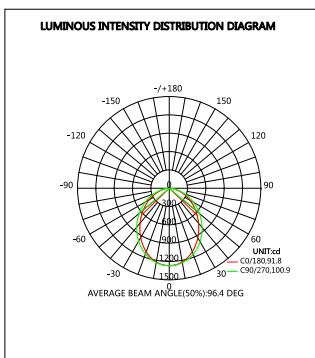


Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$;

Optional accessories

Installation accessories



- Pendant



L-PTB




L-PT



L-PTB-NPF




L-PTB-PF



- Ceiling mounted



L-SM



- Wall mounted



L457-WM

L-PTB: pendant wires with canopy

L-PT :pendant wires without canopy


L-PTB-NPF: pendant wire + canopy without cable hole

L-PTB-PF: pendant wire + canopy with cable hole


L-SM: screw for ceiling mounted

L457-WM: wall mounted clip

Disassembly tool

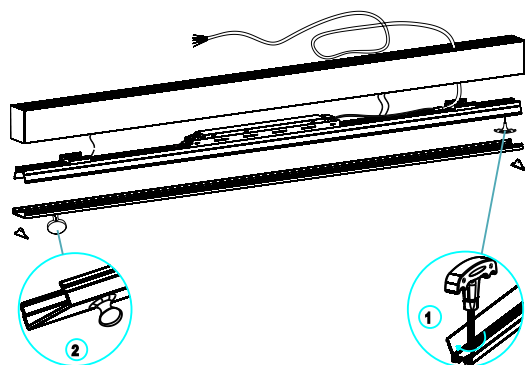

L-DA-D



L-DA-A

- Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker