



Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;


Parameter

Size	2449mm(8.03ft)X73mm(0.24ft)X80mm(0.26ft)
Beam angle	96°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	≥ 0.9
Input power	68W (8.5W/ft)
CCT	3000K/4000K/6000K (3500K 、 5000K)
CRI	80+/90+
Lumen	6700~7105lm(836~866lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Surface installation
Package size	2570mm(8.43ft)X130mm(0.43ft)X126mm(0.41ft)
Gross Weight	8.05Kg


Test report

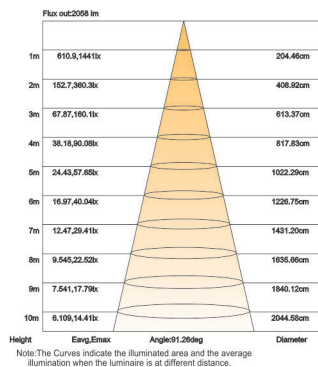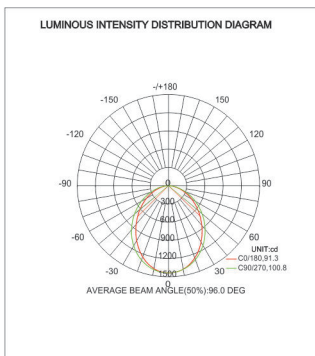


Size

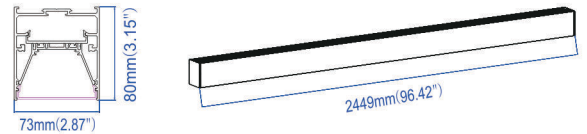

Standard color

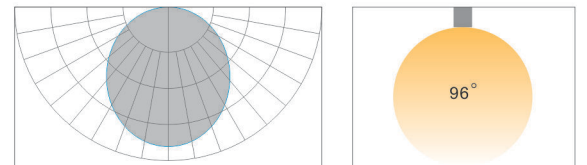

PDM

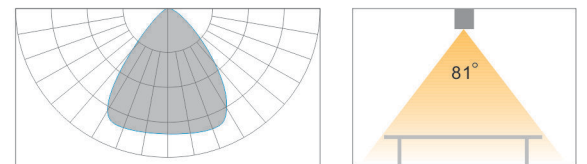


UGR < 19

Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$;

Optional accessories

Installation accessories



• Pendant



L-PTB




L-PT



L-PTB-NPF



L-PTB-PF



• Ceiling mounted



L-SM



• Wall mounted



L457-WM

L-PTB: pendant wires with canopy

L-PT :pendant wires without canopy


L-PTB-NPF: pendant wire + canopy without cable hole

L-PTB-PF: pendant wire + canopy with cable hole


L-SM: screw for ceiling mounted

L457-WM: wall mounted clip


Connection solution

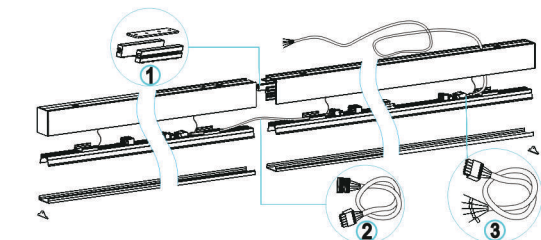


• Connection



L45-180



L-CH




Ac in line

L45-180: straight connector

L-CH: electric connection cable

Ac in line: AC input cable

Disassembly tool

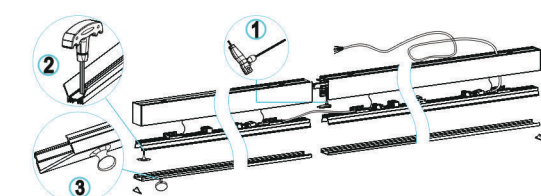

• Tool



L-IT



L-DA-D



L-DA-A


L-IT: hexagonal screw driver

L-DA-D: disassembly tool

L-DA-A: Rubber sucker

Optional accessories


Connector sets




• L7380-a34-90L



90L sets




Mechanical connection




Electrical connection


Dimension: L646.1mm(2.12ft) * W646.1mm(2.12ft)
Power: 34W(8.5W/ft)
CCT: 3000K/4000K/6000K




• L7380-a51-90T



90T sets




Mechanical connection




Electrical connection


Dimension: L1219.2mm(4ft) * W646.1mm(2.12ft)
Power: 51W(8.5W/ft)
CCT: 3000K/4000K/6000K




• L7380-a68-90X



90X sets




Mechanical connection



Electrical connection


Dimension: L1219.2mm(4ft) * W1219.2mm(4ft)
Power: 68W(8.5W/ft)
CCT: 3000K/4000K/6000K




• L7380-a34-90N



90N sets




Mechanical connection



Electrical connection


Dimension: L609.6mm(2ft) * W609.6mm(2ft)
Power: 34W(8.5W/ft)
CCT: 3000K/4000K/6000K




• L7380-a34-90W



90W sets



Mechanical connection



Electrical connection


Dimension: L609.6mm(2ft) * W609.6mm(2ft)
Power: 34W(8.5W/ft)
CCT: 3000K/4000K/6000K

Applications


Features:

standardized installation
no need to do wiring,


no need to do cutting, easy
installtion




Example 1




Example 2




Example 3




Example 4




Example 5



Example 6



Example 7



Example 8