


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.32 lm/W			
MODEL	R5536-12PDM	I _{max} (cd)	764.1	S/MH (C0/180)	1.07
NOMINAL POWER(W)	23.56	LOR(%)	100.0	S/MH (C90/270)	1.18
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1776.5	η UP,DN(C0-180)	0.6,49.6
NOMINAL FLUX(lm)	1776.47	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,49.2
LAMPS INSIDE	1	η up (%)	1.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down (%)	98.8	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

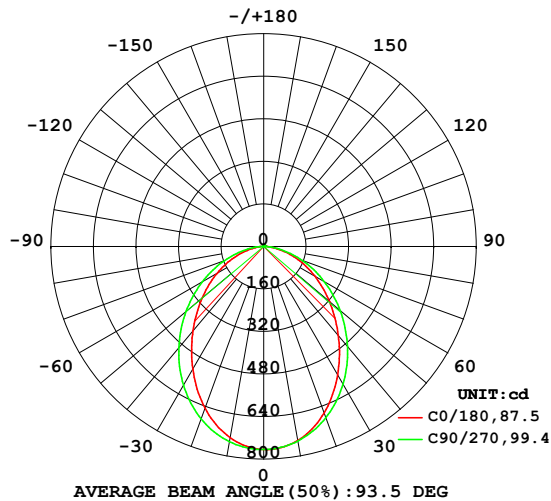

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

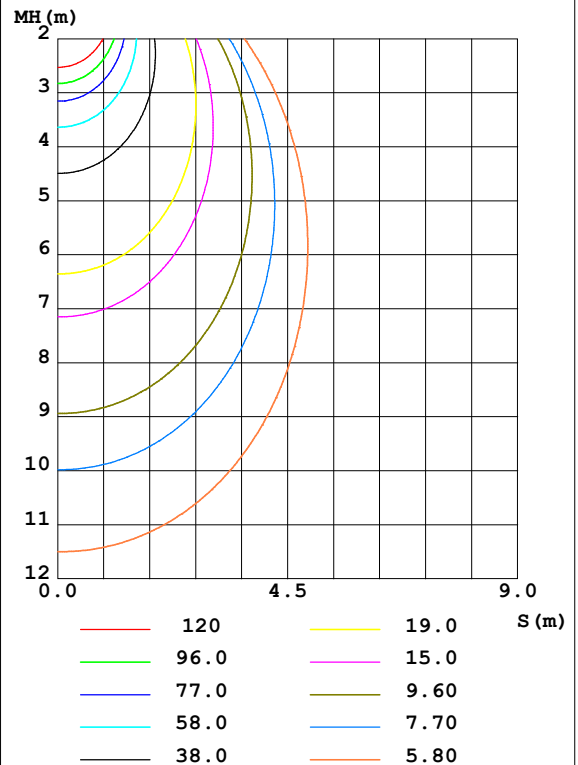

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:KEVINLI
 Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.310m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	741.0	741.9	743.0	737.1	730.2	737.6	745.5	742.5	0- 10	71.75	71.75	4.04,4.04
20	666.1	675.7	685.2	667.1	646.9	667.6	689.5	676.8	10- 20	200.0	271.7	15.3,15.3
30	557.1	576.8	597.7	566.2	533.9	566.8	603.2	578.3	20- 30	287.5	559.2	31.5,31.5
40	437.2	461.9	490.6	451.3	414.3	451.7	496.9	463.7	30- 40	322.7	881.8	49.6,49.6
50	323.5	346.5	375.7	336.6	302.6	337.1	381.8	348.2	40- 50	309.1	1191	67,67
60	221.1	238.7	262.4	229.7	202.6	230.4	267.5	240.0	50- 60	258.8	1450	81.6,81.6
70	129.3	139.4	155.0	131.7	113.1	131.5	158.6	140.1	60- 70	184.0	1634	92,92
80	50.53	52.77	59.52	47.31	37.89	47.20	61.73	53.49	70- 80	97.61	1731	97.5,97.5
90	1.722	1.718	1.916	1.690	1.460	1.580	1.831	1.573	80- 90	23.33	1755	98.8,98.8
100	1.879	2.023	2.280	2.115	1.784	1.946	2.109	1.854	90-100	1.956	1757	98.9,98.9
110	2.403	2.563	2.880	2.708	2.252	2.452	2.658	2.321	100-110	2.382	1759	99,99
120	3.090	3.218	3.533	3.407	2.846	3.052	3.232	2.897	110-120	2.804	1762	99.2,99.2
130	3.881	3.945	4.254	4.196	3.594	3.753	3.856	3.525	120-130	3.131	1765	99.4,99.4
140	4.710	4.686	4.947	4.969	4.433	4.513	4.535	4.246	130-140	3.278	1768	99.5,99.5
150	5.479	5.369	5.571	5.597	5.236	5.255	5.240	5.001	140-150	3.125	1771	99.7,99.7
160	6.185	6.032	6.161	6.236	6.045	5.989	5.919	5.726	150-160	2.622	1774	99.9,99.9
170	6.787	6.561	6.609	6.670	6.703	6.514	6.475	6.383	160-170	1.784	1776	100,100
180	7.107	6.837	6.818	6.842	7.111	6.849	6.822	6.846	170-180	0.6409	1776	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

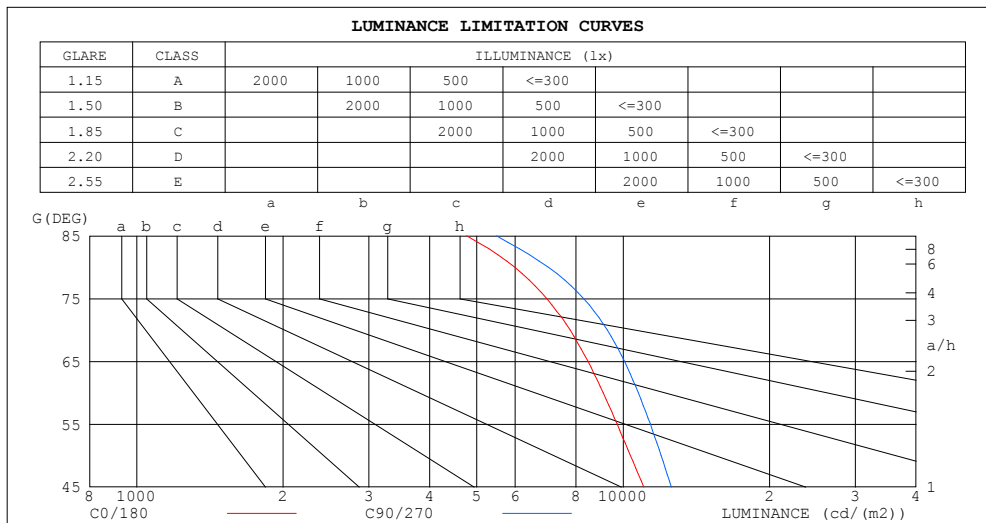

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4768	5488
80	5986	7019
75	6966	8297
70	7777	9281
65	8466	10065
60	9097	10746
55	9717	11375
50	10353	11970
45	11028	12561


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.97	1.02	.99	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.92	.86	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.74	.69	.64	.71	.67	.63	.61
4.0	.73	.64	.58	.71	.63	.57	.69	.62	.57	.66	.60	.56	.64	.59	.55	.53
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.49	.60	.54	.49	.58	.52	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.44	.54	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.39	.48	.43	.38	.36
8.0	.49	.41	.35	.49	.41	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.33
9.0	.45	.37	.32	.45	.37	.32	.44	.37	.32	.42	.36	.31	.41	.36	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.38	.33	.29	.27

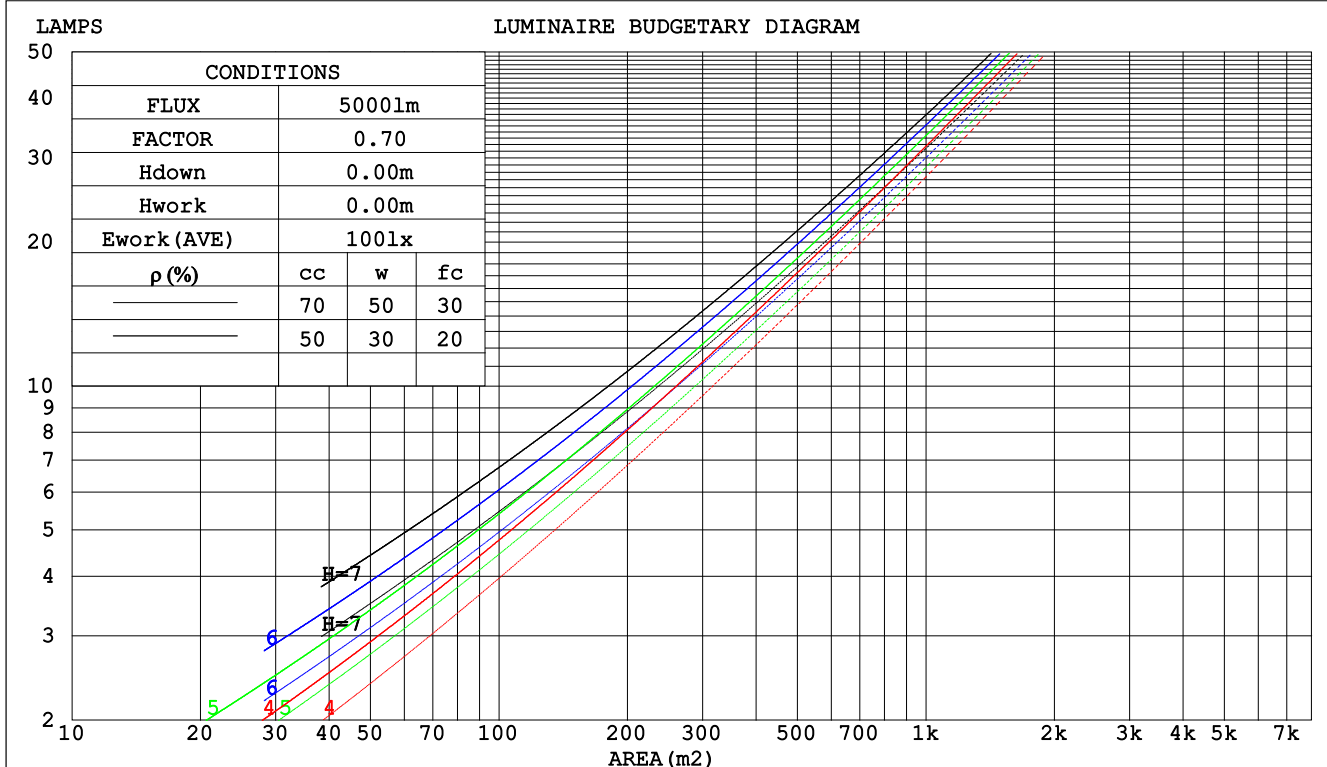

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:KEVINLI
 Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.310m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm								
NAME: R5536-12PDM				TYPE:R5536-12PDM			WEIGHT:	
SPEC.:4FT				DIM.: 4FT			SERIAL No.:1	
MFR.: BLUEVISION				SUR.:1220*40			Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.287	.163	.052	.280	.160	.051	.266	.153	.049	.253	.146	.047	.242	.140	.045		
2.0	.273	.150	.046	.266	.147	.045	.254	.141	.044	.243	.136	.043	.233	.132	.041		
3.0	.254	.135	.041	.249	.133	.040	.238	.129	.039	.228	.125	.038	.219	.121	.037		
4.0	.236	.123	.036	.231	.121	.036	.221	.117	.035	.213	.114	.034	.204	.111	.034		
5.0	.219	.112	.032	.215	.110	.032	.206	.107	.032	.198	.105	.031	.191	.102	.031		
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.186	.096	.028	.179	.094	.028		
7.0	.191	.094	.027	.187	.093	.027	.180	.091	.026	.174	.089	.026	.168	.087	.026		
8.0	.179	.087	.025	.175	.086	.024	.169	.085	.024	.164	.083	.024	.158	.081	.024		
9.0	.168	.081	.023	.165	.080	.023	.160	.079	.022	.154	.077	.022	.149	.076	.022		
10.0	.158	.076	.021	.156	.075	.021	.151	.074	.021	.146	.072	.021	.142	.071	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.146	.161	.142	.125	.110	.098	.087	.063	.057	.050	.020	.018	.016	
2.0	.179	.141	.110	.153	.122	.095	.105	.084	.066	.061	.049	.039	.019	.016	.013	
3.0	.171	.124	.086	.147	.107	.075	.101	.074	.052	.058	.043	.031	.019	.014	.010	
4.0	.163	.110	.070	.140	.095	.061	.096	.066	.043	.056	.039	.025	.018	.013	.008	
5.0	.156	.100	.058	.134	.086	.051	.092	.060	.036	.053	.035	.021	.017	.012	.007	
6.0	.149	.091	.050	.128	.079	.044	.088	.055	.031	.051	.033	.018	.017	.011	.006	
7.0	.142	.084	.044	.122	.073	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
8.0	.136	.079	.039	.117	.068	.034	.081	.048	.024	.047	.028	.014	.015	.009	.005	
9.0	.130	.074	.036	.112	.064	.031	.077	.045	.022	.045	.027	.013	.015	.009	.004	
10.0	.124	.069	.033	.107	.060	.029	.074	.042	.020	.043	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm										
NAME: R5536-12PDM					TYPE:R5536-12PDM			WEIGHT:		
SPEC.:4FT					DIM.: 4FT			SERIAL No.:1		
MFR.: BLUEVISION					SUR.:1220*40			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.4	19.8	18.7	20.0	20.3	19.1	20.6	19.4	20.8	21.0
3H	19.6	21.0	19.9	21.2	21.5	20.5	21.8	20.8	22.1	22.3
4H	20.1	21.4	20.4	21.6	21.9	21.0	22.3	21.3	22.5	22.8
6H	20.4	21.6	20.8	21.9	22.2	21.3	22.5	21.7	22.8	23.1
8H	20.5	21.7	20.9	22.0	22.3	21.4	22.6	21.8	22.9	23.2
12H	20.6	21.6	20.9	22.0	22.3	21.5	22.6	21.8	22.9	23.2
4H 2H	19.0	20.2	19.3	20.5	20.8	19.6	20.8	19.9	21.1	21.4
3H	20.4	21.5	20.8	21.8	22.1	21.1	22.2	21.5	22.5	22.9
4H	21.0	22.0	21.4	22.3	22.7	21.8	22.8	22.2	23.1	23.5
6H	21.4	22.3	21.8	22.7	23.1	22.2	23.1	22.6	23.5	23.9
8H	21.6	22.4	22.0	22.8	23.2	22.4	23.2	22.8	23.6	24.0
12H	21.6	22.4	22.1	22.8	23.2	22.4	23.2	22.9	23.6	24.0
8H 4H	21.2	22.1	21.7	22.4	22.9	21.9	22.8	22.4	23.1	23.6
6H	21.8	22.5	22.2	22.9	23.3	22.5	23.2	23.0	23.6	24.1
8H	22.0	22.6	22.5	23.0	23.5	22.7	23.3	23.2	23.8	24.2
12H	22.1	22.6	22.6	23.1	23.6	22.9	23.4	23.4	23.8	24.3
12H 4H	21.2	22.0	21.7	22.4	22.8	21.9	22.7	22.4	23.1	23.5
6H	21.8	22.4	22.3	22.9	23.4	22.5	23.1	23.0	23.6	24.1
8H	22.1	22.6	22.6	23.0	23.5	22.8	23.3	23.3	23.8	24.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 1776 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.0$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

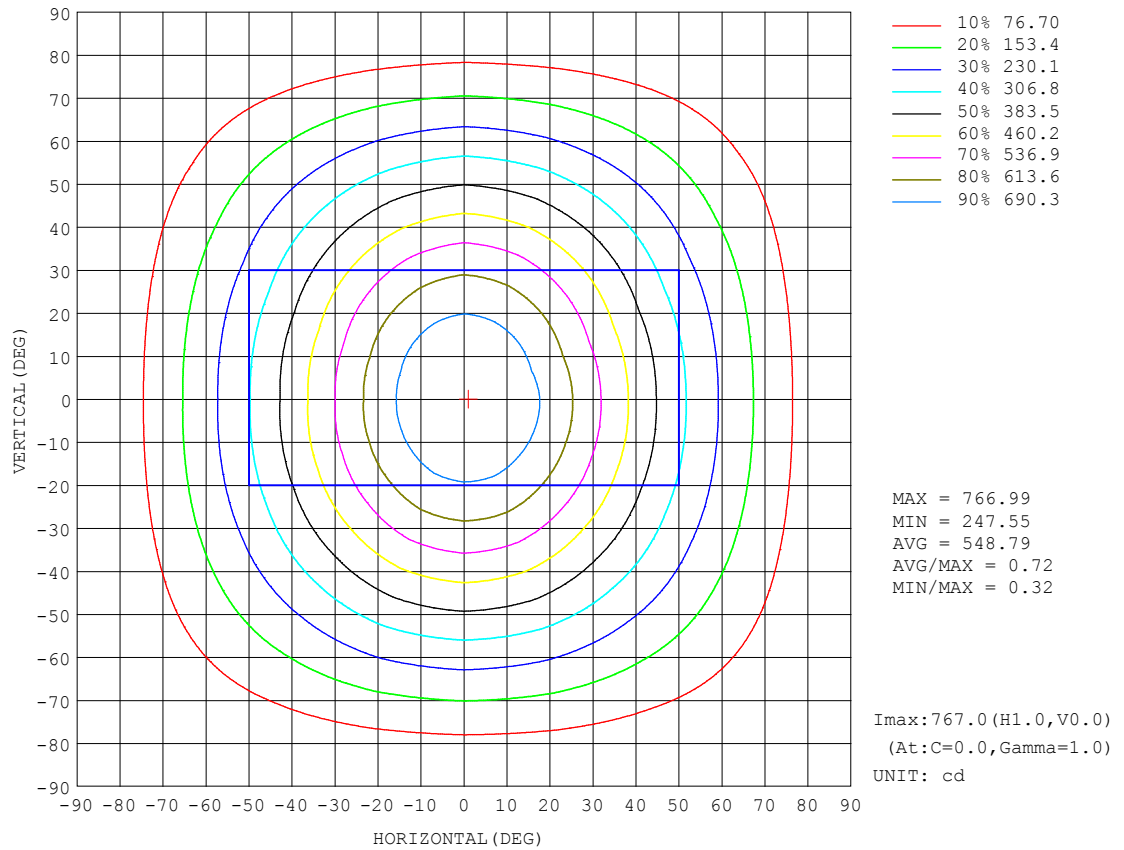


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

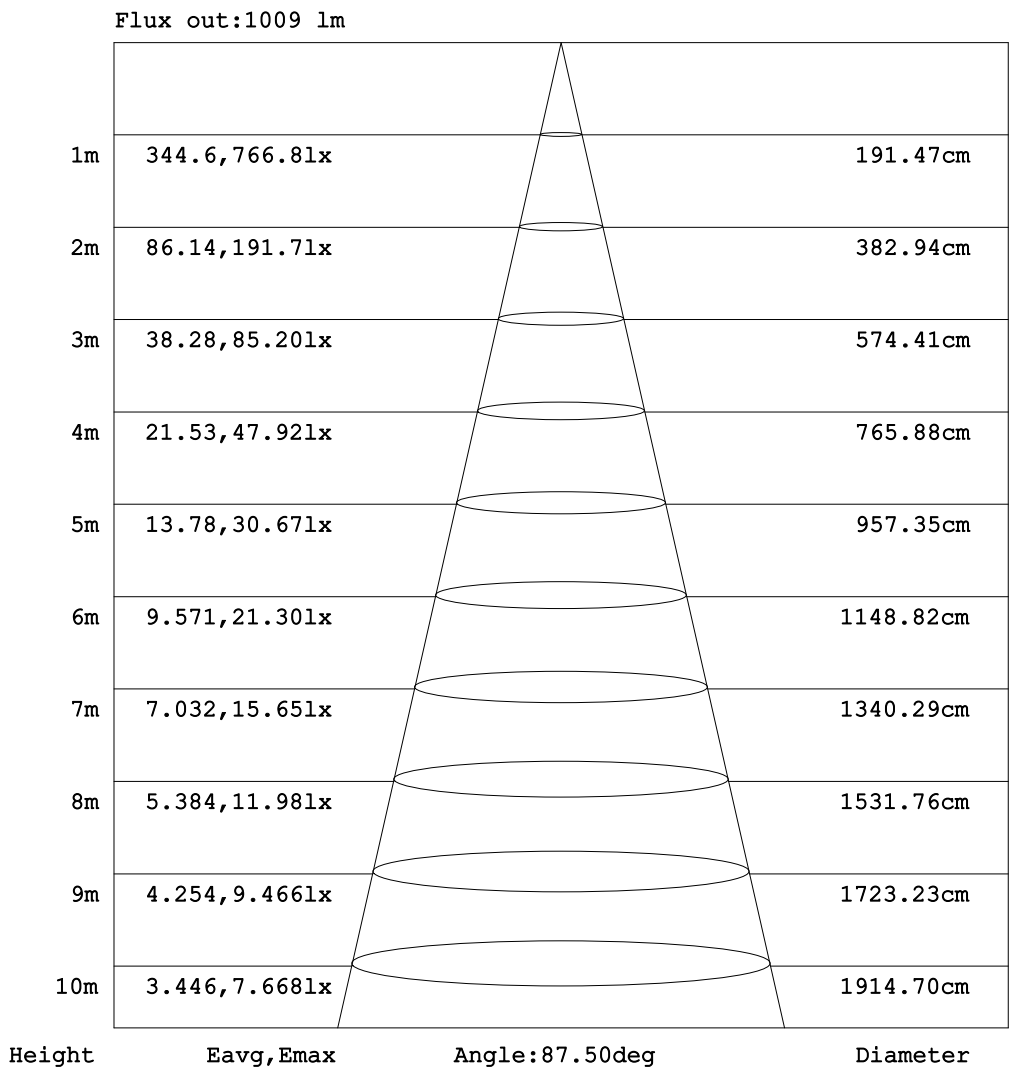


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:KEVINLI
 Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.310m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

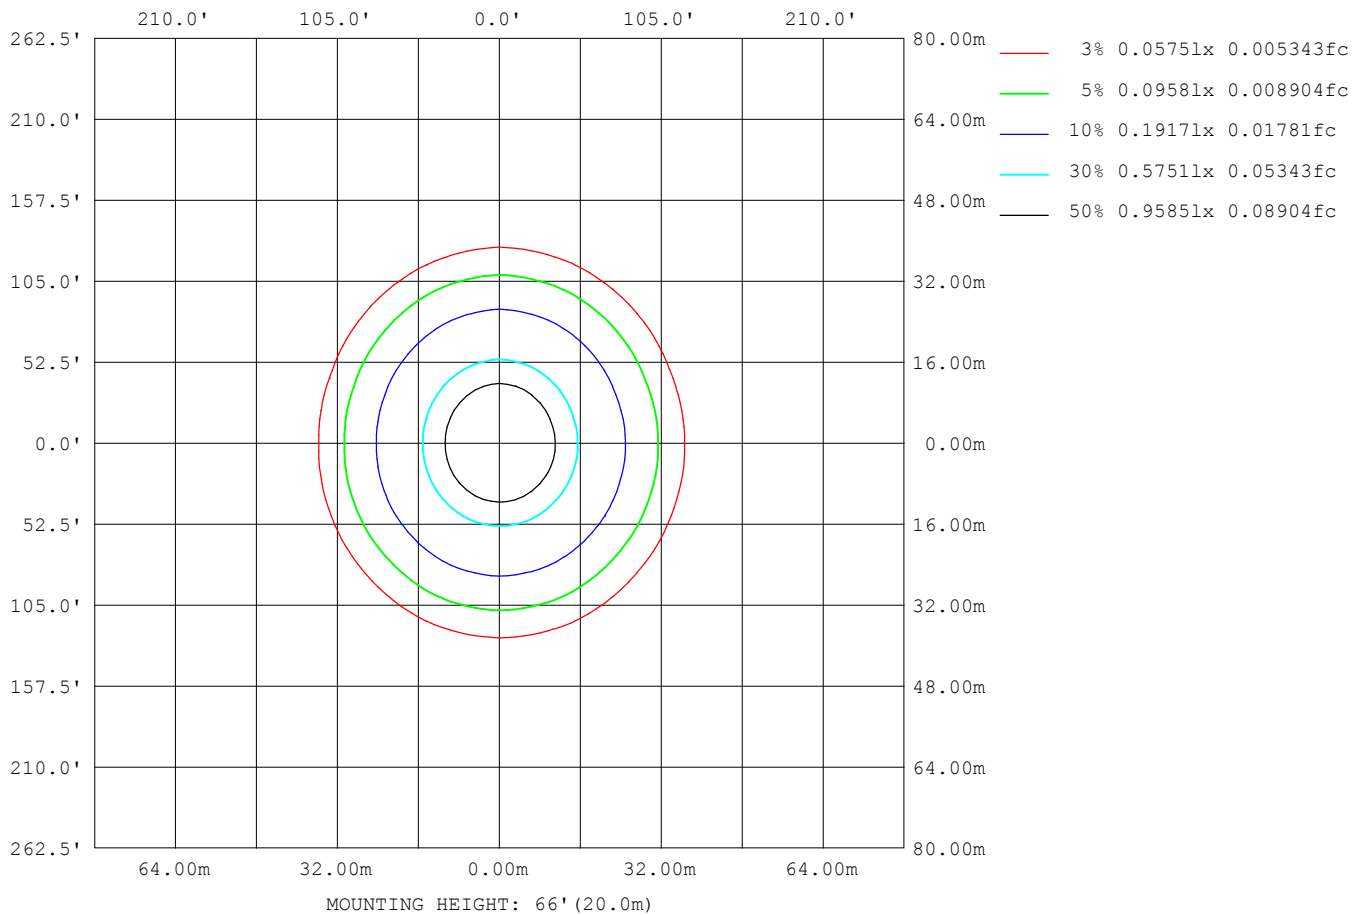

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:KEVINLI
 Test Date:2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.310m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8012
L_0~180 (75) av	6356
L_0~180 (85) av	3669
L_90~270 (65) av	10176
L_90~270 (75) av	8416
L_90~270 (85) av	5725
L_45 (65) av	8916
L_45 (75) av	7158
L_45 (85) av	4371

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks:

Planar Illuminance Curve

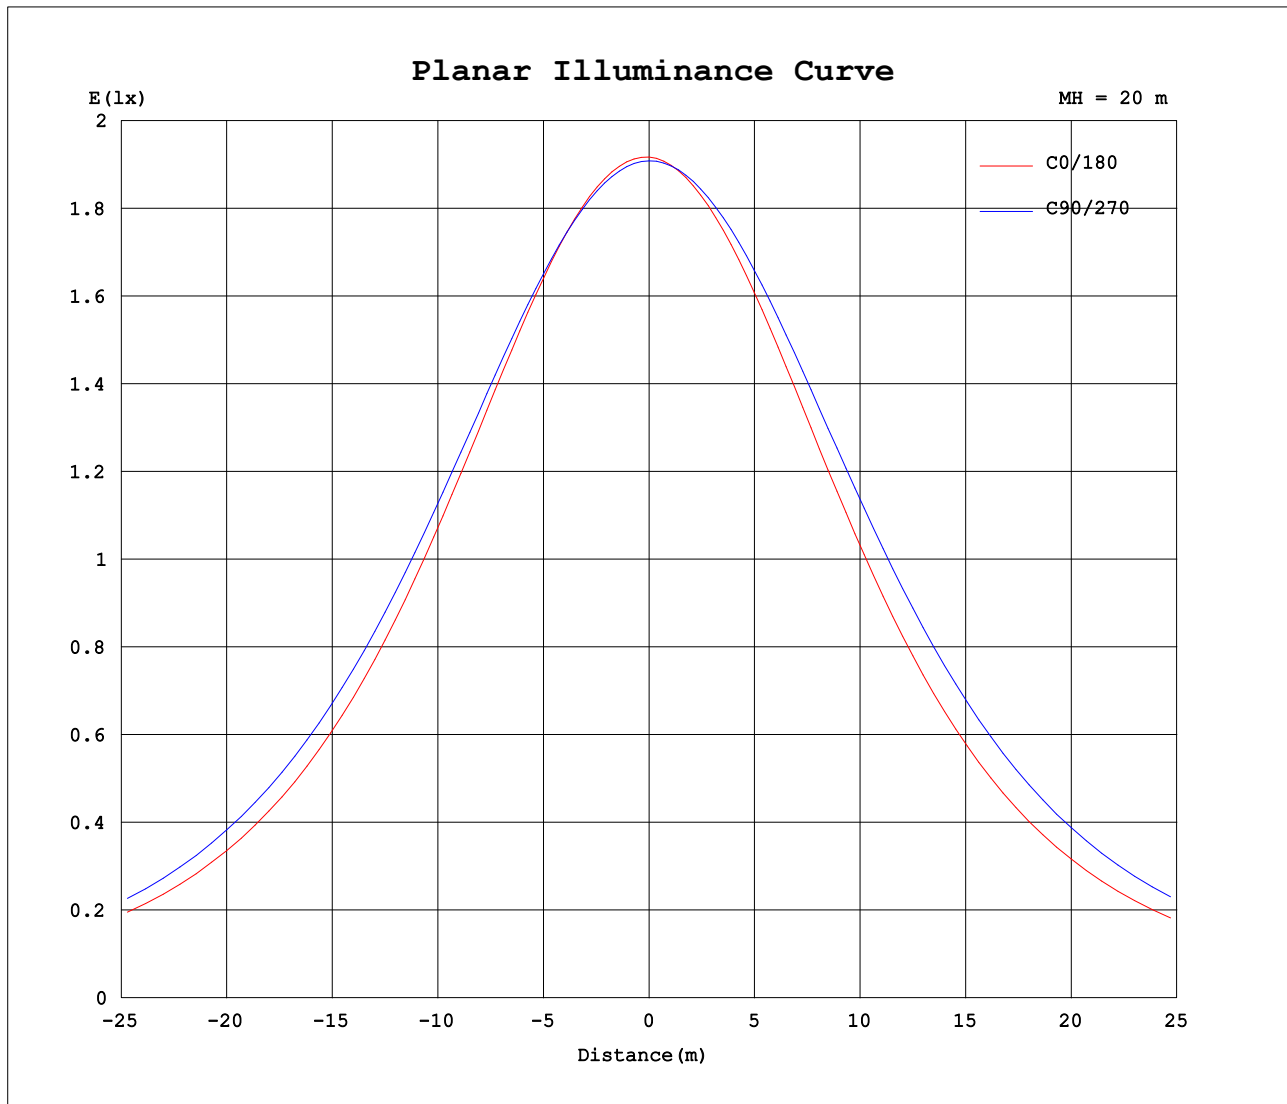

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: KEVINLI
Test Date: 2017-12-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.310m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.1122A P:23.275W PF:0.9436 Freq:49.99Hz Lamp Flux:1776.47x1 lm		
NAME: R5536-12PDM	TYPE:R5536-12PDM	WEIGHT:
SPEC.:4FT	DIM.: 4FT	SERIAL No.:1
MFR.: BLUEVISION	SUR.:1220*40	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	764	764	764	764	764	764	764	764	764	764	764	764	764	764	764	764			
5	759	759	759	759	758	758	756	756	754	754	757	758	760	759	759	758			
10	741	742	742	743	743	741	737	734	730	732	738	742	745	744	742	739			
15	709	711	714	718	718	715	707	701	694	697	707	716	722	720	715	708			
20	666	670	676	684	685	680	667	657	647	652	668	681	690	686	677	665			
25	614	620	629	642	645	637	620	605	593	600	620	639	650	644	631	615			
30	557	564	577	593	598	588	566	548	534	542	567	590	603	596	578	559			
35	497	505	520	540	546	535	509	488	474	483	510	537	552	543	522	499			
40	437	445	462	484	491	479	451	429	414	424	452	480	497	487	464	440			
45	379	387	404	427	434	421	393	371	357	366	394	423	440	429	405	382			
50	324	331	346	369	376	364	337	316	303	311	337	365	382	371	348	326			
55	271	277	292	312	319	307	282	263	251	259	283	308	324	314	293	273			
60	221	227	239	257	262	252	230	213	203	209	230	253	267	258	240	222			
65	174	178	188	203	208	199	179	166	157	162	180	199	212	204	189	174			
70	129	133	139	151	155	147	132	121	113	117	132	147	159	152	140	129			
75	87.7	89.8	93.7	103	105	98.9	86.9	79.5	72.9	75.8	86.7	98.5	108	102	94.3	86.2			
80	50.5	51.6	52.8	58.1	59.5	55.3	47.3	42.9	37.9	39.8	47.2	54.7	61.7	58.0	53.5	48.6			
85	20.2	20.7	20.4	21.9	23.4	20.8	16.5	14.2	11.0	12.1	16.5	20.7	25.3	22.9	21.0	18.4			
90	1.72	1.71	1.72	1.83	1.92	1.81	1.69	1.60	1.46	1.49	1.58	1.66	1.83	1.66	1.57	1.48			
95	1.67	1.70	1.80	1.98	2.04	2.02	1.88	1.80	1.60	1.63	1.74	1.81	1.87	1.78	1.66	1.54			
100	1.88	1.92	2.02	2.22	2.28	2.26	2.11	2.03	1.78	1.81	1.95	2.04	2.11	1.99	1.85	1.71			
105	2.12	2.16	2.27	2.48	2.58	2.55	2.40	2.29	2.00	2.03	2.18	2.29	2.38	2.23	2.07	1.93			
110	2.40	2.43	2.56	2.77	2.88	2.86	2.71	2.59	2.25	2.28	2.45	2.58	2.66	2.52	2.32	2.16			
115	2.74	2.76	2.86	3.08	3.21	3.17	3.05	2.92	2.53	2.57	2.74	2.84	2.94	2.76	2.60	2.42			
120	3.09	3.10	3.22	3.38	3.53	3.51	3.41	3.29	2.85	2.88	3.05	3.14	3.23	3.04	2.90	2.72			
125	3.46	3.48	3.57	3.73	3.90	3.87	3.79	3.71	3.21	3.24	3.39	3.44	3.54	3.33	3.19	3.06			
130	3.88	3.88	3.94	4.08	4.25	4.25	4.20	4.13	3.59	3.69	3.75	3.77	3.86	3.66	3.52	3.41			
135	4.29	4.30	4.32	4.44	4.62	4.63	4.60	4.55	4.02	4.03	4.14	4.12	4.20	3.98	3.87	3.79			
140	4.71	4.70	4.69	4.79	4.95	5.01	4.97	4.94	4.43	4.45	4.51	4.51	4.53	4.35	4.25	4.21			
145	5.10	5.11	5.04	5.11	5.26	5.35	5.28	5.32	4.86	4.86	4.89	4.89	4.89	4.72	4.63	4.61			
150	5.48	5.48	5.37	5.44	5.57	5.65	5.60	5.65	5.24	5.21	5.25	5.24	5.24	5.05	5.00	5.01			
155	5.83	5.84	5.70	5.74	5.87	5.94	5.94	5.96	5.64	5.59	5.63	5.56	5.59	5.39	5.37	5.41			
160	6.19	6.19	6.03	6.03	6.16	6.24	6.24	6.26	6.05	5.94	5.99	5.91	5.92	5.74	5.73	5.81			
165	6.55	6.51	6.33	6.31	6.41	6.49	6.46	6.55	6.42	6.29	6.26	6.21	6.23	6.06	6.07	6.18			
170	6.79	6.73	6.56	6.54	6.61	6.69	6.67	6.73	6.70	6.52	6.51	6.48	6.48	6.35	6.38	6.49			
175	7.01	6.90	6.76	6.72	6.77	6.81	6.83	6.89	6.98	6.79	6.73	6.68	6.70	6.59	6.65	6.73			
180	7.11	6.95	6.84	6.81	6.82	6.80	6.84	6.92	7.11	6.94	6.85	6.78	6.82	6.78	6.85	6.91			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:KEVINLI
Test Date:2017-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.310m [K=1.0000]
Remarks: