



## Features

- Aluminum 6063, good heat radiation with long lifespan;
- The height of carrier could be adjustable;
- Magnet assembly, easy for installation and maintenance;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan,  $\geq 50000$  hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;



## Parameter

Size	1881mm(6.17ft)X80mm(0.26ft)X35.5mm(0.12ft)
Beam angle	105°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	$\geq 0.9$
Input power	46W ( 7.7W/ft )
CCT	3000K/4000K/6000K (3500K 、 5000K)
CRI	80+/90+
Lumen	4115~4365lm(685~710lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Recessed
Package size	1930mm(6.33ft)X115mm(0.38ft)X92mm(0.3ft)
Gross Weight	3.11Kg

## Size





## Standard color




PDM

## Test report

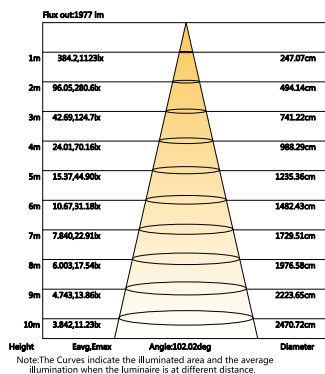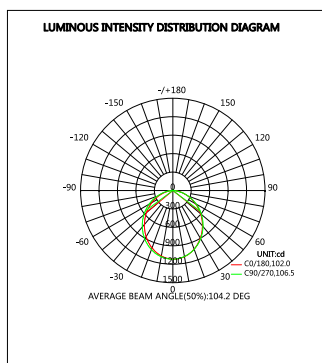

## Installation accessories



- Recessed fixed



L-SM

## Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance  $\pm 10\%$ ;