


## Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan,  $\geq 50000$  hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;

## Size

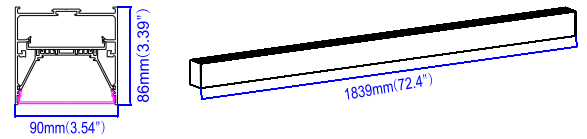




## Parameter

Size	1839mm(6.03ft)X90mm(0.3ft)X86mm(0.28ft)
Beam angle	98°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	$\geq 0.9$
Input power	68W ( 11.3W/ft )
CCT	3000K/4000K/6000K ( 3500K 、 5000K)
CRI	80+/90+
Lumen	7070~7500lm(1177~1250lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Recessed
Package size	1890mm(6.20ft)X145mm(0.48ft)X135mm(0.44ft)
Gross Weight	6.57Kg


## Standard color



## Test report

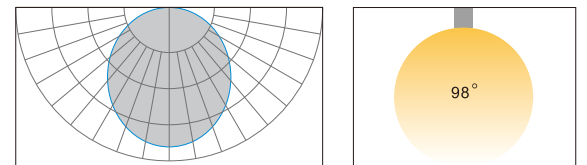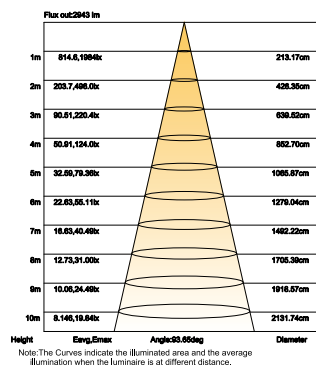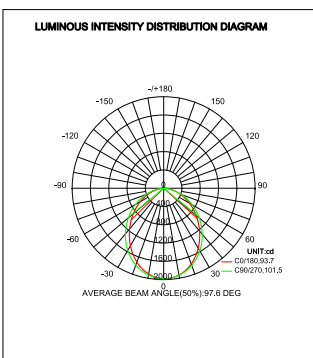

PDM

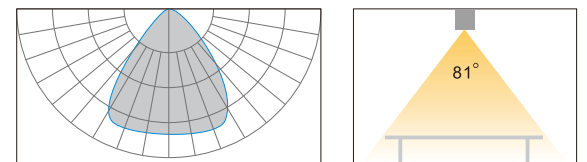

UGR<19

## Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance  $\pm 10\%$ ;

## Optional accessories

### Installation accessories





- Recessed installation

L9086-BI

L9086-BI: Recessed bracket

### Connection solution

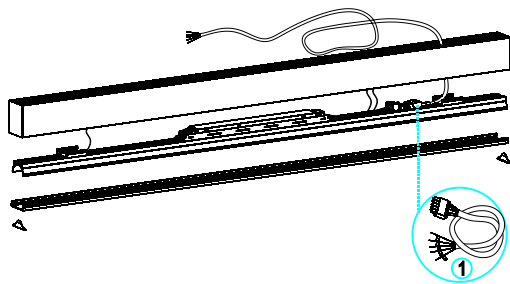


Ac in line

- Connection

Ac in line: AC input cable

### Disassembly tool

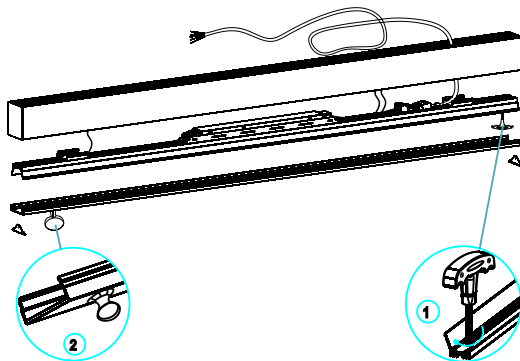

L-DA-D



L-DA-A

- Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker